



TECHNICAL DATA SHEET

S-4001-SS

18" ANTI-LIGATURE TOWEL BAR

DRAWN BY:
dmartin

5/26/2015


TOLERANCES:

FRACTION : ± 1/8"

X.XX : ± 0.010

∠ : ± 1°

X.XXX : ± 0.005

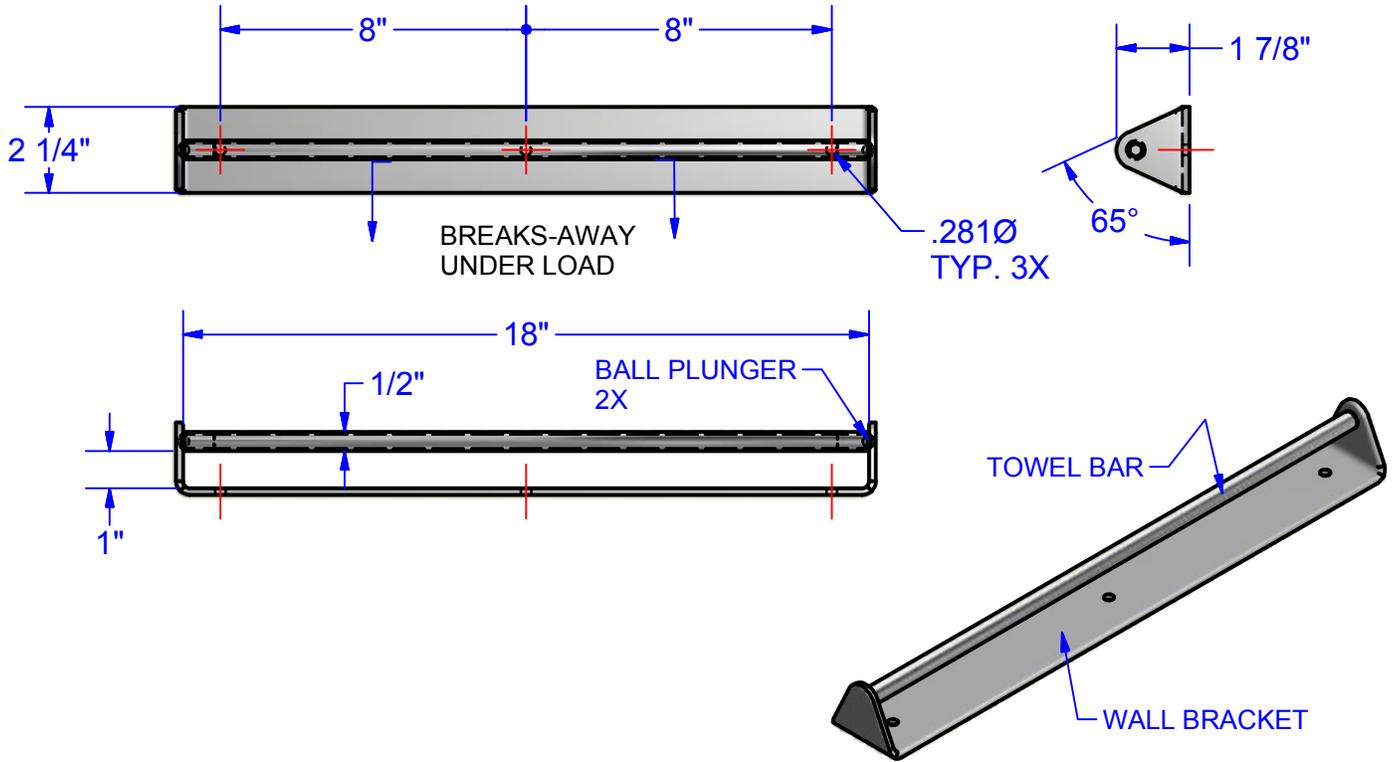

CONSTRUCTION:

TOWEL BAR: 1/2" Ø X .065 WALL TYPE 304 STAINLESS STEEL TUBE. CAPPED WITH SPRING LOADED BALL PLUNGER.

WALL BRACKET: 7 GAUGE TYPE 304 STAINLESS STEEL. (3) .281Ø MTG. HOLES.

FINISH: SATIN #4

INSTALLATION:

USE WALL BRACKET AS A TEMPLATE TO LOCATE HOLES ONTO WALL. USING APPROPRIATE FASTENERS MOUNT WALL BRACKET TO WALL. SNAP IN TOWEL BAR INTO DETENTS (DIMPLES) ON WALL BRACKET.

CONSULT LOCAL AND NATIONAL ACCESSIBILITY CODES FOR PROPER INSTALLATION GUIDELINES. CONFORMITY AND COMPLIANCE TO LOCAL AND NATIONAL CODES IS THE RESPONSIBILITY OF THE INSTALLER.

UNIT IS ONLY AS STRONG AS THE ANCHORING DEVICES AND THE WALL ON WHICH IT IS MOUNTED TO. ADEQUATE IN-WALL BACKING MAY BE REQUIRED.

SPECIFICALLY ENGINEERED TAMPER RESISTANT SECURITY SEALANT MUST BE USED ON ALL WALL GAPS.

GUIDE SPECIFICATION:

18" ANTI-LIGATURE TOWEL BAR.

TOWEL BAR RELEASES UNDER 10-15 LB LOAD RANGE.

SATIN #4 FINISH.